

TECHNICAL DATA

Max. pressure: 350 bar


Rated flow: 200 l/min

Cavity-Tooling: 18A-2

Installation torque: 465-500 Nm

Weight: 1.22 kg

Accurate pressure compensated control requires that a 200 psi (14 bar) minimum pressure differential be maintained across the valve.

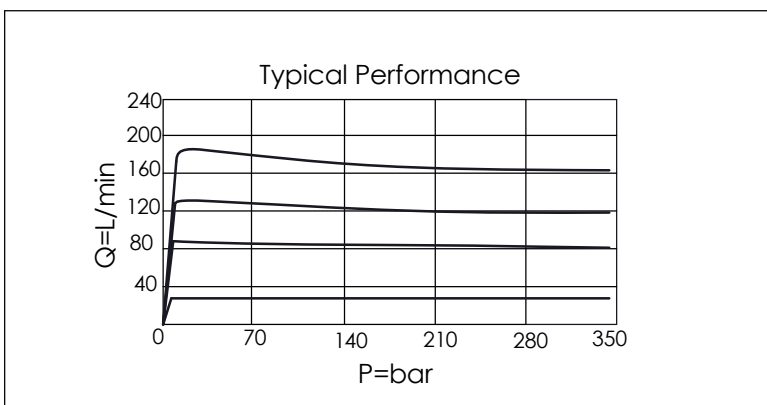

X	OPERATION	
20	Standard Type	

Y	FLOW SETTING	
A	1.0 to 200 LPM	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob.	
T	Three-winged Handknob Kit.	