


TECHNICAL DATA		
Max. pressure:	350	bar
Rated flow:	45	l/min
Cavity-Tooling:	5A-2	
Installation torque:	60-70	Nm
Weight:	0.27	kg
Accurate pressure compensated control requires that a 200 psi (14 bar) minimum pressure differential be maintained across the valve.		

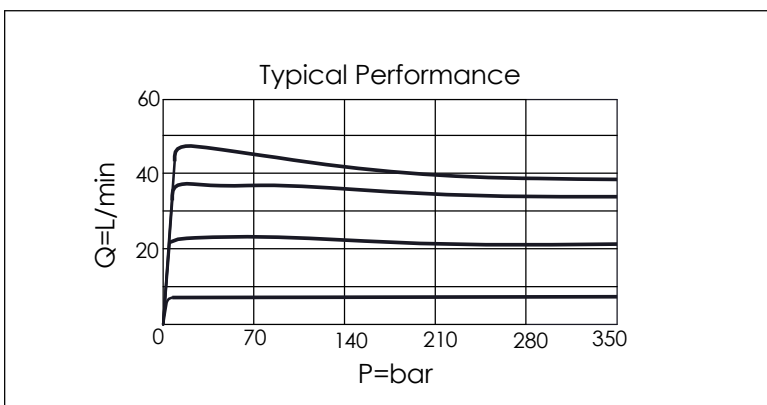

Y	FLOW SETTING	
	A	0.4 to 45 LPM

X	OPERATION	
20	Standard Type	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob.	
T	Three-winged Handknob Kit.	
LP	Leakproof hex. socket screw. With Stainless Steel External Components	