




## FLOW CONTROL VALVE

(Fully Adjustable Needle, Compact Design)

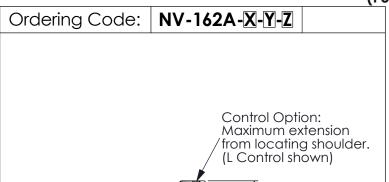





## TECHNICAL DATA

Max. operating pressure: 350 bar


Rated flow: 15 l/min (△ P=7 bar) See Performance Chart

Cavity-Tooling: 162A-2

Installation torque: 27-33 Nm

Weight: 0.08 kg

## **UNIT:mm**

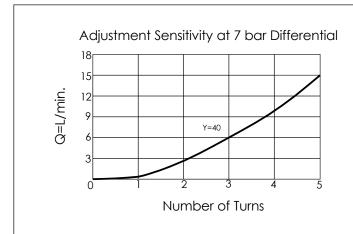

Х	OPERATION	
2\$	Needle Valve	
	,	

MAXIMUM NOMINAL ORIFICE DIAMETER	
4.0 mm	

Z	OPTIONS	
L	Leakproof hex. socket screw.	

Rev.110607 B.302.100