

# ORDERING INFORMATION

**V3066**

電動止回閥  
Cartridge  
solenoid  
check VALVE

\*\*\*

線圈型式  
Coil type  
D12:DC12v  
D24:DC24v  
A11:AC110v  
A22:AC220v  
RA 110V  
RA 220V  
(50 / 60 Hz)


\*\*

OPTION  
標準  
None:Standard(20)


付手動  
OM:With manual

**10**

設計號碼  
Design  
number

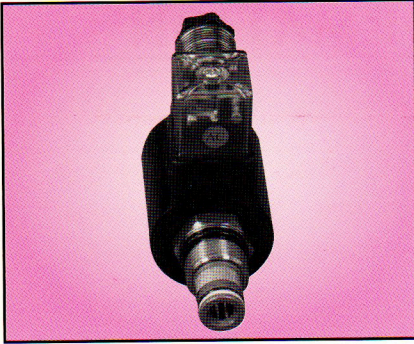

## Graphic Symbol



## DIMENSIONS

V3066						
常閉 Normally closed-NC	最大流量 Max. flow	額定流量 Rated flow	最大壓力 Max. pressure	溫度範圍 Operating temperature range	重量 kg(lbs)	接線方式 Terminations
常開 Normally open-NO	Litres/min		kgf/cm <sup>2</sup> (psi)			插頭式 DG:DIN 43650
NC	40 l/min (10.6 G.P.M)	30 l/min (8 G.P.M)	250(3500)	-20°C ~ 120°C	0.5(1.1) including coil	
20						
22						

## DIMENSIONS

## MILLMETERS (INCHES)

