

TECHNICAL DATA

Max. pressure: 350 bar


Rated flow: 95 l/min

Cavity-Tooling: 16A-2

Installation torque: 200-215 Nm

Weight: 0.52 kg

Accurate pressure compensated control requires that a 200 psi (14 bar) minimum pressure differential be maintained across the valve.

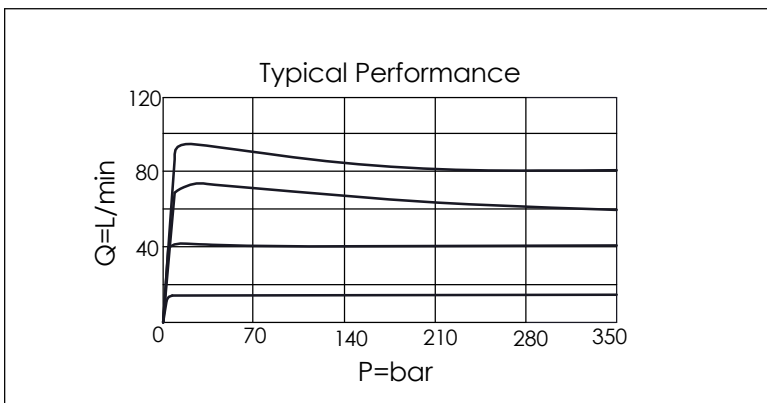

X	OPERATION	
20	Standard Type	

Y	FLOW SETTING	
A	0.8 to 95 LPM	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Konb.	
T	Three-winged Handknob Kit.	