


TECHNICAL DATA	
Max. pressure:	350 bar
Rated Flow:	36 l/min ($\Delta P=7$ bar) See Performance Chart
Cavity-Tooling:	08W-2
Installation torque:	25-35 Nm
Weight:	0.13 kg

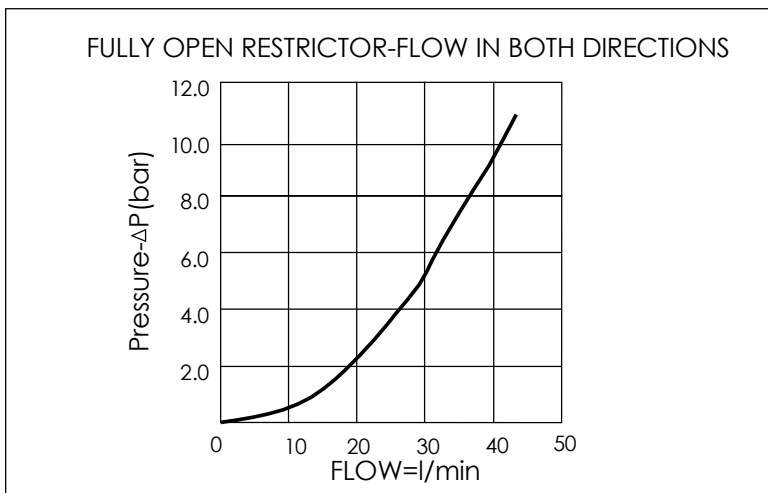

X	OPERATION
20	Needle Valve

Y	MAXIMUM NOMINAL ORIFICE
N	(Standard)

Z	OPTIONS
L	Leakproof hex. socket screw.
K	Handknob with Lock Konb.
E	Handknob and locknut.
B	Handknob and aluminum locknut.